

CF2

HOSES



APPLICATION

- transport of hot gas, vapour and exhaust gas emitted by vehicles
- various exhaust extraction systems, such as hose reels, self-tightening suction ducts, overhead- and under-floor exhaust extraction systems


ADVANTAGES

- increased thermal resistance
- wide range of diameters
- vibration absorbing
- hardly flammable

FEATURES

- coating: neoprene-coated polyester fabric
- additional reinforcement: external galvanised steel spiral, plastic coated
- standard length: 3–10 r.m.
- colour: wall black, spiral blue

FLOW CHARTS

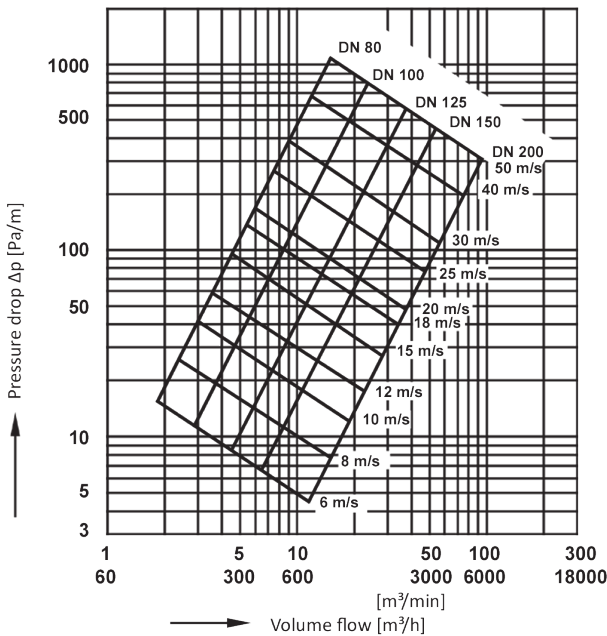

TECHNICAL DATA

Type	Part No.	Internal diameter [mm]	Unit weight [kg/m]	Temperature range of the conveyed air [°C]	Maximum vacuum [hPa]	Bending radius [mm]
CF2-80	828P17	80	0,63	from –20 up to +200	156	48
CF2-100	828P18	100	0,79	from –20 up to +200	100	60
CF2-125	828P19	125	0,95	from –20 up to +200	64	75
CF2-150	828P20	150	1,47	from –20 up to +200	44	90
CF2-200	828P21	200	1,76	from –20 up to +200	25	120