

HT-450

HOSES



APPLICATION

- transport of hot gas, vapour and exhaust gas, of temperature up to +500°C, emitted by vehicles
- various exhaust gas extraction systems, e.g. hose reels, self-tightening suction ducts and overhead extraction systems


FEATURES

- coating: high-temperature fabric, reinforced with fibres of stainless steel
- additional reinforcement with external spiral of zinc-coated steel
- standard length: 3–10 r.m.
- colour: externally - grey, inside - silver

ADVANTAGES

- hardly flammable
- abrasion resistant
- high mechanical rigidity
- increased thermal resistance
- wide range of diameters

FLOW CHARTS

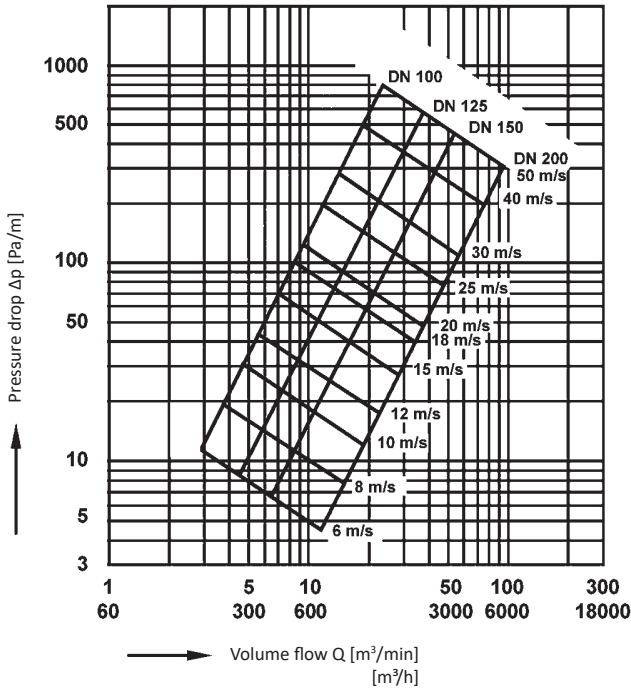

DANE TECHNICZNE

Type	Part No.	Internal diameter [mm]	Unit weight [kg/m]	Temperature range of the conveyed air [°C]	Maximum vacuum [hPa]	Bending radius [mm]
HT-450-100	826P24	100	1,3	from -20 up to +450 (for short time up to +500)	88	60
HT-450-125	826P25	125	1,5	from -20 up to +450 (for short time up to +500)	55	75
HT-450-150	826P26	150	1,8	from -20 up to +450 (for short time up to +500)	40	90
HT-450-200	826P27	200	2,4	from -20 up to +450 (for short time up to +500)	22	140