

HT-650

HOSES



APPLICATION

- transport of hot gas, vapour and exhaust gas, of temperature up to +750°C, emitted by vehicles
- various exhaust gas extraction systems, e.g. hose reels, self-tightening suction ducts and overhead extraction systems


ADVANTAGES

- vibration absorbing
- hardly flammable
- abrasion resistant
- increased thermal resistance
- wide range of diameters

FEATURES

- coating: high-temperature fabric, coated with temperature stabilisers, reinforced with fibres of stainless steel
- additional reinforced with steel spiral
- standard length: 3–10 r.m
- colour: silver

FLOW CHARTS

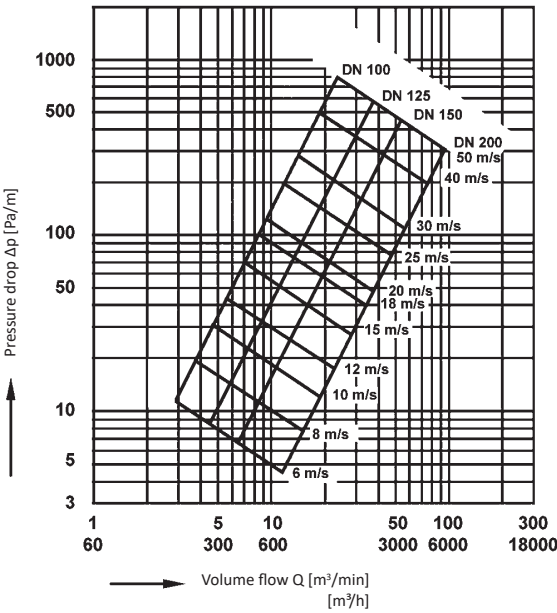

DANE TECHNICZNE

Type	Part No.	Internal diameter [mm]	Unit weight [kg/m]	Temperature range of the conveyed air [°C]	Maximum vacuum [hPa]	Bending radius [mm]
HT-650-100	826P10	100	1,57	from -20 up to +650 (for short time up to +750)	168	60
HT-650-125	826P11	125	1,93	from -20 up to +650 (for short time up to +750)	105	75
HT-650-150	826P12	150	2,29	from -20 up to +650 (for short time up to +750)	76	90
HT-650-200	826P13	200	3,01	from -20 up to +650 (for short time up to +750)	42	120