

MCS

HOSES




APPLICATION

- extraction of welding fumes
- extraction of soldering vapours
- forwarding of various dusts
- ventilation and air-supply heating
- application in exhaust gas extraction

FEATURES

- coating: PVC-coated glass fibre, reinforced with external metal spiral
- standard length: 3 – 10 r.m.
- colour: dark grey

FLOW CHARTS

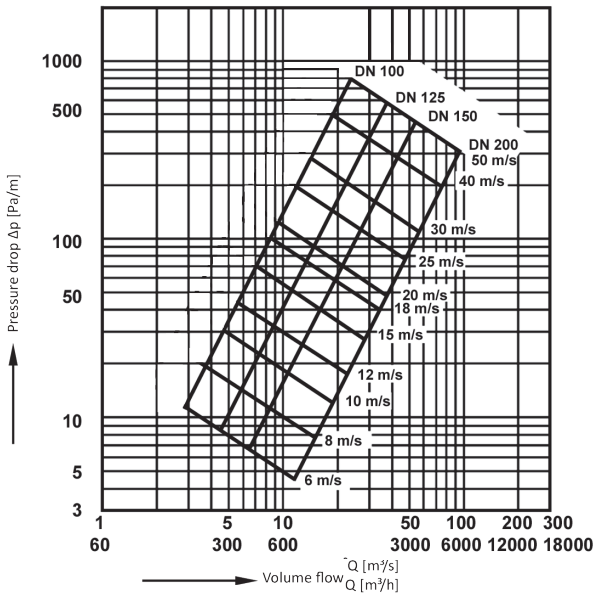

TECHNICAL DATA

| Type | Part No. | Internal diameter [mm] | Unit weight [kg/m] | Temperature range of the conveyed air [°C] | Operational pressure [hPa] | Maximum vacuum [hPa] | Bending radius [mm] |
|---------|----------|------------------------|--------------------|---|----------------------------|----------------------|---------------------|
| MCS-100 | 828P32 | 100 | 0,60 | from -20 up to +90 (for short time up to +110) | 300 | 80 | 60 |
| MCS-125 | 828P33 | 125 | 0,80 | from -20 up to +90 (for short time up to +110) | 210 | 50 | 75 |
| MCS-150 | 828P36 | 150 | 0,90 | from -20 up to +90 (for short time up to +110) | 157 | 36 | 90 |
| MCS-160 | 828P34 | 160 | 0,90 | from -20 up to +90 (for short time up to +110) | 140 | 31 | 96 |
| MCS-200 | 828P35 | 200 | 1,20 | from -20 up to +90 (for short time up to +110) | 99 | 20 | 120 |