

# PLT/Z

HOSES



### APPLICATION

- gas forwarding in underground mining plants, in non-methane and methane areas, in rooms of methane explosion hazard a, b, c


### ADVANTAGES

- anty-electrostatic
- hardly flammable

### FEATURES

- two layers of polyamide fabric, PVC-coated from both sides
- reinforced with a resilient wire spiral interwoven between the layers
- the fabric is admitted by Higher Mining Institute No. CZ/1473/2006 for application in underground mining plants
- standard length: 5 m
- colour: black

### FLOW CHARTS

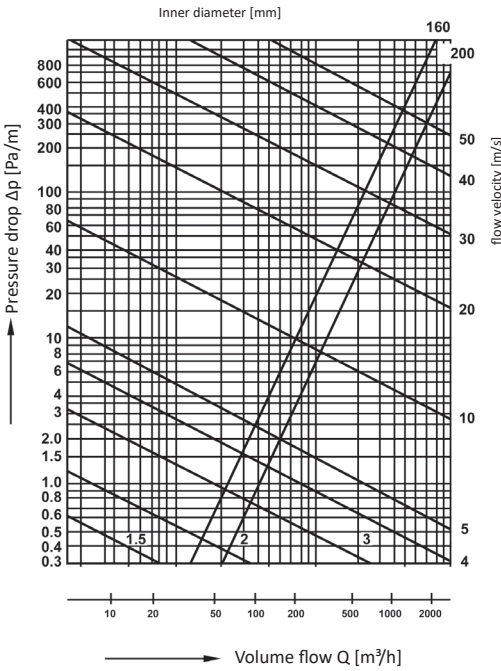

### TECHNICAL DATA

Type	Part No.	Internal diameter [mm]	Unit weight [kg/m]	Temperature range of the conveyed air [oC]	Maximum pressure [Pa]	Maximum vacuum [Pa]
PLT/Z-160	828P08	160	3,9/5	from -15 up to +70	15 000	3000
PLT/Z-200	828P11	200	4,6/5	from -15 up to +70	15 000	3000
PLT/Z-250	828P09	250	5,8/5	from -15 up to +70	15 000	3000